INSTALLER CATALOG

PRODUCTS FOR:

- Quick Lubes
- Full-Service Garages
- Powersports Service Garages
- Specialty Shops

AMSOIL Brings in More Customers

We will partner with you to increase car counts and sales per ticket, creating loyal customers who return to your shop again and again.

- Boost you car count
- Boost your reputation
- Boost your business

Get the Lowest Pricing

All AMSOIL installer accounts purchase at wholesale prices and can qualify for discounts based on annual purchase volumes.

Installer Program Benefits

Total Annual Purchases	U.S.: <$9,999.99 Canada: <$11,999.99	U.S.: $10,000-$24,999.99 Canada: $12,000-$29,999.99	U.S.: $25,000-$99,999.99 Canada: $30,000-$109,999.99	U.S.: $100,000+ Canada: $110,000+
Discount	**0%**	**5%**	**10%**	**15%**
Co-op Credit Earned		2% ($1,000 Maximum)	2% ($1,000 Maximum)	2% ($1,000 Maximum)
Free Shipping & Lift Gate	$400 U.S./$450 Can.	$400 U.S./$450 Can.	$400 U.S./$450 Can.	$400 U.S./$450 Can.
Listed on AMSOIL Locator	X ($3,500 Minimum Annual Purchases)	X	X Premier	X Premier
Co-Branded Print Center	X	X	X	X
Marquee Sign Support			X	X

Personalized Marketing Support

Increase Sales Per Ticket

Pain-Free Logistics

Expansive Product and Package Selection

A Brand in Demand

Contents

SECTION COLOR CODE

The AMSOIL Value Proposition 4

The Right Tools for the Job 5

Product Catalog 8

- Motor Oil 8
- Diesel Oil 16
- Transmission Fluid 20
- Gear Oil 21
- Gasoline Fuel Additives 22
- Diesel Fuel Additives 23
- Cleaners and Protectants 24
- Coolant 26
- Air Tool Oil/Compressor Oil/Brake Fluid/Power Steering Fluid 27

Boost Your Car Count. Boost Your Reputation. Boost Your Business.

Personalized Marketing Support

We drive customers to your business with customized marketing designed to help you grow and win.

Increase Sales Per Ticket

AMSOIL provides high-value products and technical experts to help you sell the protection and performance your customers deserve.

Pain-Free Logistics

We offer fast, free shipping and volume discounts with no contracts, plus no-cost dispensing equipment to make it easy for you to grow your business.*

Expansive Product and Package Selection

We carry a full line of synthetic and synthetic-blend lubricants, including high-mileage, European and diesel oils.

A Brand in Demand

Carrying AMSOIL products attracts loyal, passionate, high-value customers and enhances the reputation of your business.

FORMULATED, BLENDED AND PACKAGED IN THE USA

*Orders of $400 U.S./ $450 Canada get free shipping. Orders below those thresholds pay a flat rate of $13.99 U.S./$14.99 Canada.
Ask your AMSOIL Dealer about the AMSOIL Bulk Dispensing Program.

The Right Tools for the Job

Personalized Marketing

AMSOIL helps drive customers to your business with customized marketing. Choose from business cards, posters, sell sheets, menu boards and a variety of other branded materials. You can even personalize these items with your brand by adding your business logo and contact information. Customized items are available at AMSOIL.com/installerprintcenter.

Business Card

Menu Board

Poster

Annual Co-Op Credit

Installer accounts that purchase $10,000 or more within a calendar year earn 2% co-op credit (up to $1,000) that can be applied to the costs of qualified advertising, literature, merchandising and promotional items. Choose from a variety of items like banners, hats, jackets and other marketing materials to grow your business.

Brand Your Store

AMSOIL offers a variety of items for you to purchase to help promote AMSOIL in your shop.

AMSOIL Locator

The AMSOIL website receives tens of thousands of visitors each day, many of whom are searching for stores or auto service centers that offer AMSOIL synthetic lubricants. Qualified AMSOIL installer accounts appear on the AMSOIL locator at AMSOIL.com with a complete profile page, helping increase traffic through your doors. Ask your AMSOIL Dealer about how your business can be listed as a premier installer on the AMSOIL Locator.

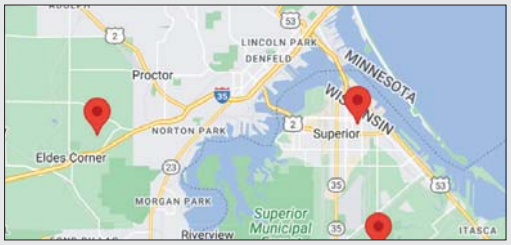



Dispensing Equipment

AMSOIL provides industry-leading lubricant dispensing equipment through the AMSOIL Dispensing Equipment Program. The program is designed to help accounts that value lower prices, reduced waste and space-saving bulk packaging.

- Buying in bulk saves money.
- Helps qualify for free shipping and lift-gate service.
- Helps alleviate administrative burdens; reduces expenses and waste.
- Delivers more efficiency for vehicle operations.
- Maximizes floor space; provides flexibility to move fluids with mobile systems.

Maximize Savings

Products come in a variety of convenient package sizes, including quarts, gallon jugs, 2.5-gallon jugs, 55-gal. drums and 275-gal. totes. The larger the package size you order, the greater the savings.

Smaller package sizes also available for additives, grease and aerosols.

Average Savings per Gallon* When you Buy by the Drum

	OE Synthetic Motor Oil	Synthetic-Blend Motor Oil	High-Mileage Synthetic Motor Oil	Extended-Life Synthetic Motor Oil
Case of Quarts Price Per Gallon (Wholesale)	$26.66	$21.96	$32.24	$35.45
55-Gallon Drum Price Per Gallon (Wholesale)	$24.06	$18.18	$28.49	$30.95
Savings per Gallon	$2.60	$3.78	$3.75	$4.50

**Based on wholesale pricing difference between cases of quarts and 55-gallon drums*

Products Tailored to Your Business that Deliver Unmatched Protection for Your Customers

AMSOIL provides a complete portfolio of synthetic and synthetic-blend lubricants to help you cover a wide array of vehicles.

AMSOIL OE 100% Synthetic Motor Oil

Protection and performance that exceed industry standards.

- Fights sludge and deposits with 100% synthetic formulation.
- 47% more wear protection[1] than required by the GM dexos1 Gen 2 specification.
- 100% protection against LSPI[2] in the engine test required by the GM dexos1 Gen 2 specification.
- API licensed.

AMSOIL Synthetic-Blend Motor Oil

Higher-quality components with better low-temperature pumpability and reduced deposits compared to conventional oils.

- Greater than 50% synthetic content for boosted protection.
- All-temperature protection.
- Keeps engines clean.
- Helps reduce oil consumption.
- API licensed.

AMSOIL 100% Synthetic High-Mileage Motor Oil

Restorative power to clean and protect aging engines.

- Unique chemistry for vehicles with over 75,000 miles.
- Boosted detergent and dispersant package.
- Enhanced anti-wear additives.
- Reduced sludge by 67%,[3] demonstrating cleaning power that helps engines last longer and perform better.
- Guaranteed protection for 12,000 miles/1-year[4].
- API licensed.

[1]Based on independent testing of OE 0W-20 in the Peugeot TU3M Wear Test as required by the dexos1 Gen 2 specification.
[2]Based on zero LSPI events in five consecutive tests of AMSOIL OE 5W-30 Motor Oil in the LSPI engine test required by the GM dexos1 Gen 2 specification.
[3]Based on independent testing of AMSOIL 0W-20 100% Synthetic High-Mileage Motor Oil using a modified Sequence VH Test (ASTM D8256).
[4]Normal Service – Up to 12,000 miles or one year, whichever comes first, in personal vehicles not operating under severe service.

Motor Oil

OEF

Most viscosities available in these package sizes:

QUART | GALLON | GALLONS | GALLONS

OE 100% Synthetic Motor Oil

Delivers 100% synthetic engine protection for advanced automotive technology, including turbos and direct injection. Specifically formulated for the longer drain intervals recommended by original equipment (OE) manufacturers.

0W-16 • OES

Use in vehicles that require *API SP (Resource Conserving), SN PLUS, SN… • ILSAC GF-6B*

0W-20 • OEZ

Use in vehicles that require *API SP (Resource Conserving), SN PLUS, SN… • ILSAC GF-6A, GF-5, GF-4… • GM dexos1® Gen 3 (supersedes dexos1 Gen 2, 6094M) • Ford WSS-M2C947-A, WSS-M2C947-B1, WSS-M2C962-A1 • Chrysler MS-6395 • ACEA A1/B1*

5W-20 • OEM

Use in vehicles that require *API SP (Resource Conserving), SN PLUS, SN… • ILSAC GF-6A, GF-5, GF-4… • GM dexos1® Gen 3 (supersedes dexos1 Gen 2, 6094M) • Ford WSS-M2C930-A, WSS-M2C945-A, WSS-M2C945-B1, WSS-M2C960-A1 • Chrysler MS-6395 • ACEA A1/B1*

5W-30 • OEF

Use in vehicles that require *API SP (Resource Conserving), SN PLUS, SN… • ILSAC GF-6A, GF-5, GF-4… • GM dexos1® Gen 3 (supersedes dexos1 Gen 2, LL-A-025, 6094M, 4718M) • Ford WSS-M2C929-A, WSS-M2C946-A, WSS-M2C946-B1, WSS-M2C961-A1 • Chrysler MS-6395 • ACEA A1/B1, A5/B5 • Honda HTO-06*

10W-30 • OET

Use in vehicles that require *API SP (Resource Conserving), SN PLUS, SN… • ILSAC GF-6A, GF-5, GF-4… • GM 4718M, 6094M • Ford WSS-M2C205-A • Chrysler MS-6395 • ACEA A1/B1, A5/B5*

0W-40 • OEG

Use in vehicles that require *API SP, SN PLUS, SM…*

OE Protects Against Wear

Provides **47 percent more** wear protection.[G]

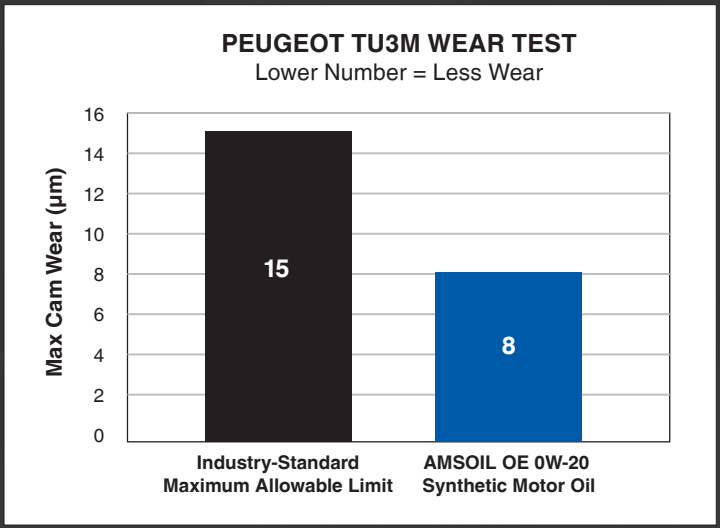

[G]Based on independent testing of OE 0W-20 in the Peugeot TU3M Wear Test as required by the dexos1 Gen 2 specification.

SB020 SB520 SB530

Available in these package sizes:

Synthetic-Blend Motor Oil

Designed for those seeking an upgrade in protection over conventional oils. Features greater than 50% synthetic content to provide boosted protection for the latest engine technologies, including turbochargers and direct injection. Delivers excellent protection against wear and sludge to help keep engines running clean and provide long engine life.

0W-20 • SB020

Use in vehicles that require *API SP (Resource Conserving), SN Plus, SN… • ILSAC GF-6A, GF-5, GF-4 • GM dexos1® Gen 3 • Chrysler MS-6395 • Ford WSS-M2C962-A*

5W-20 • SB520

Use in vehicles that require *API SP (Resource Conserving), SN Plus, SN… • ILSAC GF-6A, GF-5, GF-4 • GM dexos1® Gen 3 • Chrysler MS-6395 • Ford WSS-M2C960-A*

5W-30 • SB530

Use in vehicles that require *API SP (Resource Conserving), SN Plus, SN… • ILSAC GF-6A, GF-5, GF-4 • GM dexos1® Gen 3 • Chrysler MS-6395 • Ford WSS-M2C961-A*

Helps Reduce Oil Consumption

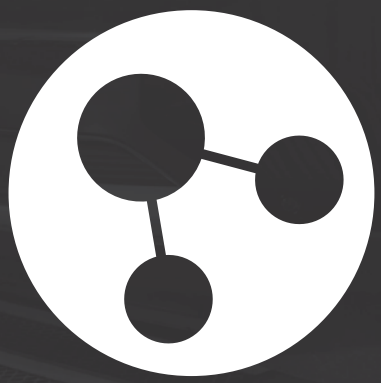

High Synthetic Content

Durable Protection

HM520

100% Synthetic High-Mileage Motor Oil

Engineered for vehicles with over 75,000 miles. Designed specifically for the unique demands of high-mileage engines, helping extend the life of vehicles.

0W-20 • HM020

Use in vehicles that require *API SP, SN Plus, SM…. • ILSAC GF-6A, GF-5, GF-4… • GM dexos1* Gen 3 (supersedes dexos1 Gen 2 and 6094M) • Chrysler MS-6395 • Ford WSSM2C947-A, WSS-M2C947-B1, WSS-M2C962-A1*

5W-20 • HM520

Use in vehicles that require *API SP SN, SN Plus, SM…. • ILSAC GF-6A, GF-5, GF-4… • GM dexos1* Gen 3 (supersedes dexos1 Gen 2 and 6094M) • Chrysler MS-6395 • Ford WSS-M2C930-A, WSSM2C945-A, WSS-M2C945-B1, WSS-M2C960-A1*

5W-30 • HM530

Use in vehicles that require *API SP SN, SN Plus, SM…. • ILSAC GF-6A, GF-5, GF-4… • GM dexos 1* Gen 3 (supersedes dexos 1 Gen 2, GM 4718M, 6094M) • Chrysler MS-6395 • Ford WSS-M2C929-A, WSS-M2C946-A, WSS-M2C946-B1, WSS-M2C961-A1*

10W-30 • HM1030

Use in vehicles that require *AAPI SP SN, SN Plus, SM…. • ILSAC GF-6A, GF-5, GF-4… • GM 4718M, 6094M • Chrysler MS-6395 • Ford WSSM2C205-A*

Available in these package sizes:

AMSOIL Removes Sludge

AMSOIL 100% Synthetic High-Mileage Motor Oil **reduced sludge by 67%**,[VV] demonstrating its cleaning power that helps engines last longer and perform better.

AMSOIL 100% Synthetic High-Mileage Motor Oil Removes Sludge

Modified ASTM D8256 – Sequence VH

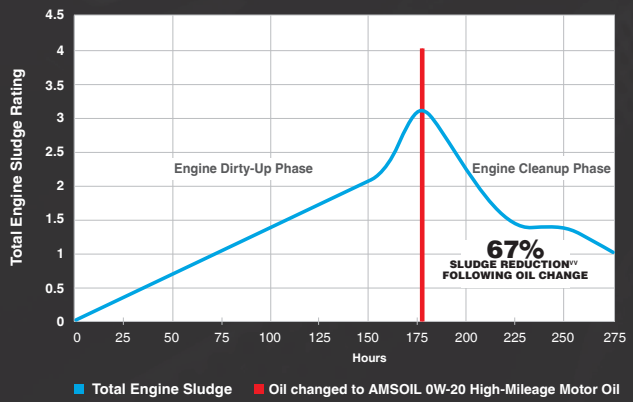

[VV]Based on independent testing of AMSOIL 0W-20 100% Synthetic High-Mileage Motor Oil using a modified Sequence VH Test (ASTM D8256).

AMSOIL Prevents Deposits

AMSOIL 100% Synthetic High-Mileage Motor Oil provides **up to 62% better deposit prevention**.[WW1]

TEOST 33C (ASTM D6335)

Lower = Better

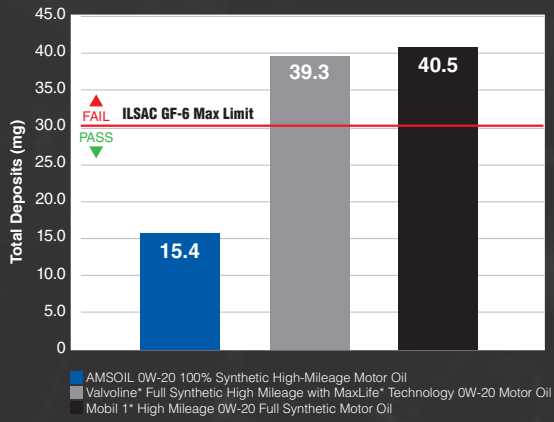

[WW1]Based on independent testing of AMSOIL 0W-20 100% Synthetic High-Mileage Motor Oil, Valvoline Full Synthetic High-Mileage with MaxLife* Technology 0W-20 Motor Oil (batch codeJ2622C5 purchased December 21, 2022) and Mobil 1* High-Mileage 0W-20 Full Synthetic Motor Oil (batch code 11022L21A 6606 purchased December 8, 2022) in the industry-standard TEOST 33C Test (ASTM D6335) as required by the ILSAC GF-6 specification. *All trademarked names are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.*

XLF

Extended-Life 100% Synthetic Motor Oil

Overbuilt for road warriors so you can confidently drive up to 20,000 miles or 1 year, whichever comes first, between oil changes. A proprietary combination of advanced synthetic base oils and a boosted additive package promotes cleanliness and prolonged engine life. AMSOIL Extended-Life protection delivers peace of mind and convenience.

0W-20 • XLZ

Use in vehicles that require *API SP (Resource Conserving), SN PLUS, SN… • ILSAC GF-6A, GF-5, GF-4… • GM dexos1® Gen 3 (supersedes dexos1 Gen 2, 6094M) • Ford WSS-M2C947-A, WSS-M2C947-B1, WSS-M2C962-A1 • Chrysler MS-6395 • ACEA A1/B1*

5W-20 • XLM

Use in vehicles that require *API SP (Resource Conserving), SN PLUS, SN… • ILSAC GF-6A, GF-5, GF-4… • GM dexos1® Gen 3 (supersedes dexos1 Gen 2, 6094M) • Ford WSS-M2C930-A, WSS-M2C945-A, WSS-M2C945-B1, WSS-M2C960-A1 • Chrysler MS-6395 • ACEA A1/B1*

5W-30 • XLF

Use in vehicles that require *API SP (Resource Conserving), SN PLUS, SN… • ILSAC GF-6A, GF-5, GF-4… • GM dexos1® Gen 3 (supersedes dexos1 Gen 2, LL-A-025, 6094M, 4718M) • Ford WSS-M2C929-A, WSS-M2C946-A, WSS-M2C946-B1, WSS-M2C961-A1 • Chrysler MS-6395 • ACEA A1/B1, A5/B5 • Honda HTO-06*

10W-30 • XLT

Use in vehicles that require *API SP (Resource Conserving), SN PLUS, SN… • ILSAC GF-6A, GF-5, GF-4… • GM 4718M, 6094M • Ford WSS-M2C205-A • Chrysler MS-6395 • ACEA A1/B1, A5/B5*

10W-40 • XLO

Use in vehicles that require *API SP, SN PLUS, SN… • ACEA A3/B3, A3/B4*

Available in these package sizes:

Provides More Cleaning Power

AMSOIL Extended-Life Synthetic Motor Oil has **37% more cleaning power** to help keep your engine running smoother, longer.[UU]

[UU]*Compared to AMSOIL OE Synthetic Motor Oil.*

AFL

Available in these package sizes:

QUART GALLON

100% Synthetic European Motor Oil

Premium synthetic formulation designed for the unique demands of European engines. Protects advanced emissions systems. Excellent for both gasoline and diesel engines. Fights sludge for superior engine cleanliness. Outstanding all-season performance. Designed for the extended drain intervals established by European car manufacturers. Excellent for turbochargers.

0W-20 LS • AFE

Use in vehicles that require *API SN-PLUS (Resource Conserving) • SN, SM... • ILSAC GF-5 • ACEA C5 • A1/B1 • BMW LL-17FE+ • MB 229.71 • Ford WSS-M2C947-B1 • Opel/Vauxhall OV0401547 • Fiat 9.55535-GSX • Chrysler MS-12145 • Volvo VCC RBS0-2AE*

0W-20 LS-VW • EZT

Use in vehicles that require *API SN-PLUS, SN... • ACEA C5 • VW 508.00/509.00, TL52577 • Porsche C20*

0W-30 MS • EOT

Use in vehicles that require *API SP, SN PLUS, SN • ACEA C2, C3 • BMW LL-01FE • MB 229.31, 229.51, 229.52 • VW/Audi 504.00/507.00 • Porsche C30*

5W-30 LS • AEL

Use in vehicles that require *API SN • SM... • ACEA C3 • BMW LL-04 • Porsche C30 • VW 504.00 • 507.00 • GM dexos 2 • Chrysler MS-11106 • MB 229.51*

0W-40 FS • EFO

Use in vehicles that require *API SN, SM... • ACEA A3/B3, A3/B4 • BMW LL-01 • MB 229.1, 229.3, 229.5 • Porsche A40 • Renault 0700, 0710 • VW 502.00, 505.0*

5W-40 • AFL

Use in vehicles that require *API SN, SM, CF... • ACEA C3 • MB 229.51 • Porsche A40 • Chrysler MS-10850 • GM dexos 2 • VW 502.00, 505.01 • Ford WSS-M2C917-A • Renault 0700, 0710 • BMW Longlife-04*

10W-60 FS • ETS

Use in vehicles that require *API SN • ACEA A3/B3, A3/B4*

HE020

ZRD

Available in these package sizes:

QUART

100% Synthetic Hybrid Motor Oil

Custom formulation designed to combat the unique challenges posed by hybrid electric vehicles (HEV) and plug-in hybrid electric vehicles (PHEV).

0W-8 • HE08
Use in vehicles that require *JASO GLV-1*

0W-16 • HE016
Use in vehicles that require *API SP (Resource Conserving), SN Plus, SM.... • ILSAC GF-6B*

0W-20 • HE020
Use in vehicles that require *API SP (Resource Conserving), SN Plus, SN.... • ILSAC GF-6A, GF-5, GF-4... • GM dexos1* Gen 3 (supersedes dexos1 Gen 2 and 6094M) • Chrysler MS-6395 • Ford WSS-M2C962-A1*

Z-ROD® Synthetic Motor Oil

High-zinc, high-phosphorus formulation engineered specifically for classic cars and performance vehicles.

10W-30 • ZRT
Use in vehicles that require *10W-30 motor oil.*

10W-40• ZRD
Use in vehicles that require *10W-30 motor oil.*

20W-50 • ZRF
Use in vehicles that require *20W-50 motor oil.*

Available in these package sizes:

QUART

AMSOIL Delivers Better Cold-Temperature Protection

AMSOIL provides up to 16% better low-temperature viscosity than Mobil 1,* delivering better protection at startup.[TT]

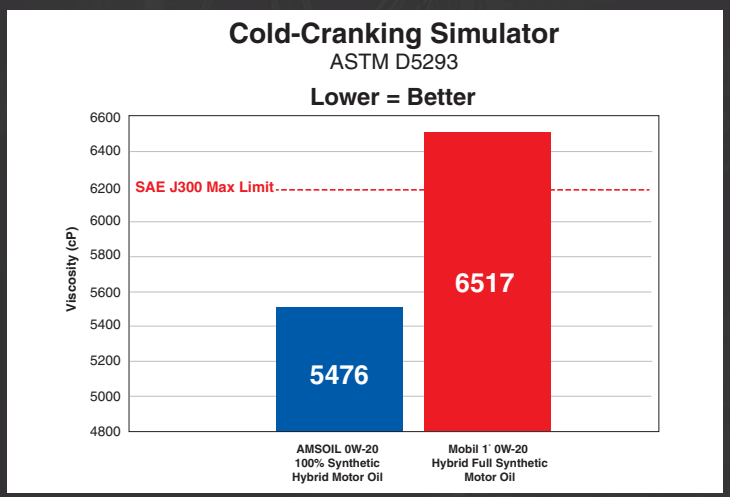

*[TT]Based on independent, third-party testing of AMSOIL 0W-20 100% Synthetic Hybrid Motor Oil and Mobil 1 0W-20 Hybrid Full Synthetic Motor Oil (batch code 10222M14A RN6613 326900 D340BUDE015 purchased April 17, 2023) in the industry-standard ASTM D5293 Cold Crank Simulator test as required by SAE J300. *All trademarked names are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.*

AMSOIL Delivers Superior Rust Protection

In industry-standard testing, AMSOIL Z-ROD® completely prevented rust formation while a leading competitor did not.[JJ]

[JJ]Based upon in-house testing of AMSOIL Z-ROD 10W-40 and a leading competitor obtained on 7/25/2019 in ASTM D1748-10.

Competing Brand

ASL

Most viscosities available in these package sizes:

Signature Series 100% Synthetic Motor Oil

Engineered for enthusiasts seeking maximum protection and performance. Precision-formulated with cutting-edge technology and a longstanding devotion to making the world's best motor oil. The result: engine protection that blows the doors off the highest industry standards

0W-16 • AZS

Use in vehicles that require *API SP (Resource Conserving), SN Plus, SN... • ILSAC GF-6B*

0W-20 • ASM

Use in vehicles that require *API SP (Resource Conserving), SN PLUS, SN... • GM dexos1* Gen 3 (supersedes dexos1 Gen 2 and 6094M) • ACEA A1/B1 • Ford WSS-M2C947-B1, WSSM2C947-A, WSS-M2C962-A1 • Chrysler MS-6395 • ILSAC GF-6A, GF-5, GF-4*

5W-20 • ALM

Use in vehicles that require *API SP (Resource Conserving), SN PLUS, SN... • GM dexos1* Gen 3 (supersedes dexos1 Gen 2 and 6094M) • ACEA A1/B1 • Ford WSS-M2C945-B1, WSSM2C945-A, WSS-M2C930-A, WSS-M2C960-A1 • Chrysler MS-6395 • ILSAC GF-6A, GF-5, GF-4*

0W-30 • AZO

Use in vehicles that require *API SP (Resource Conserving), SN PLUS, SN... • GM dexos1* Gen 3 (supersedes dexos1 Gen 2, LL-A-025, 6094M and 4718M) • ACEA A5/B5, A1/B1 • Ford WSS-M2C963-A1 • Chrysler MS-6395 • ILSAC GF-6A, GF-5, GF-4*

5W-30 • ASL

Use in vehicles that require *API SP (Resource Conserving), SN PLUS, SN... • GM dexos1* Gen 3 (supersedes dexos1 Gen 2, LL-A-025, 6094M and 4718M) • ACEA A5/B5, A1/B1 • Honda HTO-06 • Ford WSS-M2C946-B1, WSS-M2C946-A, WSS-M2C929-A, WSS-M2C961-A1 • Chrysler MS-6395 • ILSAC GF-6A, GF-5, GF-4*

10W-30 • ATM

Use in vehicles that require *API SP (Resource Conserving), SN PLUS, SN... • ACEA A5/B5, A1/B1 • Ford WSS-M2C205-A • Chrysler MS-6395 • GM LL-A-025, 6094M, 4718M • ILSAC GF-6A, GF-5, GF-4...*

0W-40 • AZF

Use in vehicles that require *API SP, SN PLUS, SN... • Chrysler MS-A0921, MS-12633, MS-10725, MS-10850 • Nissan GT-R • GM dexos R*

5W-50 • AMR

Use in vehicles that require *API SP, SN PLUS, SN... • Ford WSS-M2C931-C (Mustang) • GM dexos R*

Signature Series Delivers Powerful Protection

AMSOIL delivers powerful protection. How good is it? An independent lab compared AMSOIL synthetic motor oil head-to-head against a leading competitor in a 100,000-mile test.[P] AMSOIL provided far superior wear protection and kept bearings looking like new.

[P]Testing conducted in an independent lab using AMSOIL Signature Series 5W-30 Synthetic Motor Oil and a leading synthetic-blend 5W-30 motor oil in Ford F-150 trucks with 3.5L twin-turbo engines.

Signature Series Improves Startup Protection

AMSOIL provides better cold cranking viscosity, helping improve wear protection for engine components at startup.[PP]

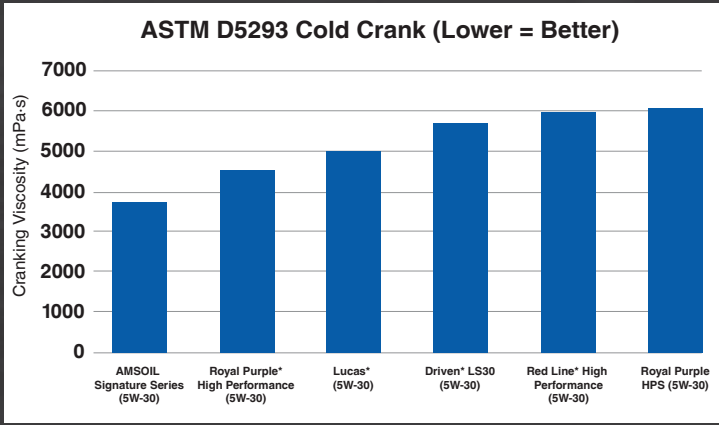

*[PP]Based on independent third-party testing in the industry-standard ASTM D5293 Cold Crank Simulator test as required by SAE J300. *All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.*

AMSOIL Helps Keep Engines Cleaner

AMSOIL Signature Series is fortified with a heavy treatment of detergent additives, delivering **28 percent more** acid-neutralizing power than Mobil 1* and helping engines stay cleaner, longer.[LL]

*[LL]Based upon independent testing of Mobil 1 Annual Protection Full Synthetic 5W-30 and AMSOIL Signature Series 5W-30 in ASTM D2896. Oils purchased July 2020. *All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.*

Signature Series Cleans

AMSOIL Signature Series Synthetic Motor Oil has **50% more** detergents[D] to help keep oil passages clean and promote oil circulation. It provides **90% better protection** against sludge.[DD]

Dvs. AMSOIL OE Motor Oil DDBased on independent testing of AMSOIL Signature Series 5W-30 in the ASTM D6593 engine test for oil screen plugging as required by the API SN specification.

The oil pick-up tube screen is virtually free of sludge.

AMSOIL Keeps Pistons Cleaner

Even after doubling the length of the industry-standard test, AMSOIL delivered **40% cleaner pistons** than required by the standard.[FF]

[FF]Based on independent testing of AMSOIL Signature Series 5W-30 in the Sequence IIIH Engine Test (ASTM D8111), required by the ILSAC GF-6 and API SP specifications.

Signature Series Fights Wear

75% more engine protection against horsepower loss and wear.[A]

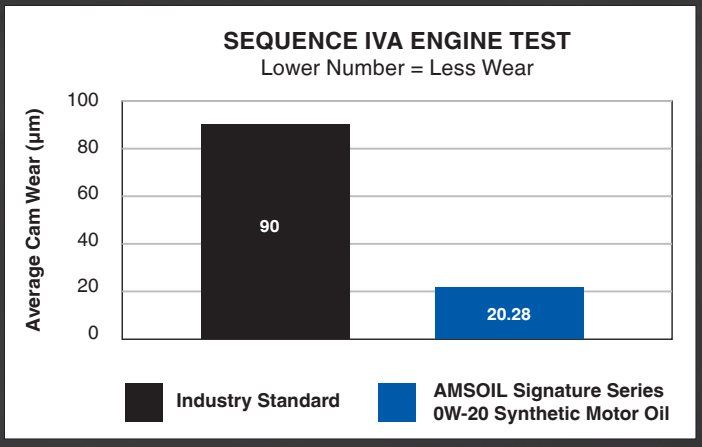

[A]Based on independent testing of AMSOIL Signature Series 0W-20 using the ASTM D6891 standard test.

Diesel Oil

DME

Available in these package sizes:

QUART · 1 GALLON · 2.5 GALLONS · 55 GALLONS · 275 GALLONS

Signature Series Max-Duty Synthetic Diesel Oil

Engineered to deliver maximum protection and performance for diesel engines. Provides 6X more engine protection than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K2222.

5W-30 • DHD

Use in vehicles that require *API CK-4/SN, SN PLUS, CJ-4, CI-4+, CF · ACEA E9, E7, E6 · Mack EOS-4.5, EO-O · Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MB 228.51, 228.31 · MTU Type 3.1, 2.1, II, I · MAN 3677, 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC IV-10 LA, DQC III-10 LA · Scania LA-2 · Chrysler MS 10902 · Ford WSS-M2C214-B1*

10W-30 • DTT

Use in vehicles that require *API CK-4/SN, CJ-4, CI-4+, CF · Volvo VDS4.5, VDS4, VDS3 · Mack EOS-4.5, EO-O · Renault RLD-4, RLD-3 · Cummins CES20086, CES20081 · Caterpillar ECF-2, ECF-3, ECF-1-a · Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214 · ACEA E9, E7 · MB 228.31 · MAN 3575 · MTU Type 2.1, II, I · JASO DH-2 · Deutz DQC III-10LA · Ford WSS-M2C171-F1 · Chrysler MS-10902*

0W-40 • DZF

Use in vehicles that require *API CK-4/SN, CJ-4, CI-4+, CF · ACEA E9, E7 · Mack EOS-4.5, EO-O · Detroit Diesel DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MTU Type 2.1, II, I · MAN 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC III-10 LA · Chrysler MS 10902 · Ford WSS-M2C171-F1*

5W-40 • DEO

Use in equipment that requires *API CK-4/SN, CJ-4, CI-4+, CF, CF-2 · ACEA E9, E7 · Mack EOS-4.5, EO-O · Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MB 228.31 · MTU Type 2.1, II, I · MAN 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC III-10 LA · Allison TES-439 · Scania LA-2 · Chrysler MS 10902 · Ford WSS-M2C171-F1*

15W-40 • DME

Use in vehicles that require *API CK-4/SN, CJ-4, CI-4+, CF, CF-2 · ACEA E9, E7 · Mack EOS-4.5, EO-O · Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MB 228.31; MTU Type 2.1, II, I · MAN 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC III-10 LA · Allison TES-439 · Scania LA-2 · Chrysler MS 10902 · Ford WSS-M2C171-F1*

AMSOIL Fights Wear

Signature Series Synthetic Max-Duty Diesel Oil delivers **powerful engine protection.** How good is it? In independent testing compared to a leading brand, it provided long-lasting wear protection, **keeping cylinder liners looking like new.**[DD]

[DD]*Based on independent testing of AMSOIL 5W-30 Signature Series Max-Duty Synthetic Diesel Oil and a leading conventional 15W-40 diesel oil using the Detroit Diesel® DD13 Scuffing test for specification DFS 93K222. ®All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.*

Reduces Oil Consumption

AMSOIL Heavy-Duty Synthetic Diesel Oil provides up to **66% less** oil consumption, while Signature Series Max-Duty Synthetic Diesel Oil provides up to **76% less** oil consumption.[L]

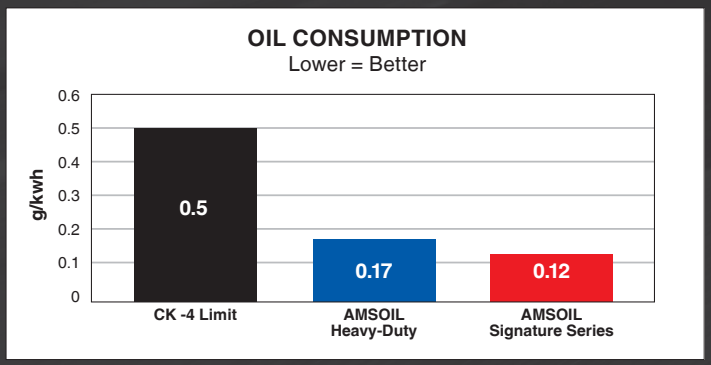

[L]*Than required by the API CK-4 standard in the Caterpillar-1N oil consumption test.*

ADP

Heavy-Duty Synthetic Diesel Oil

Outstanding protection and performance for customers seeking an upgrade over conventional and other synthetic diesel oils. Provides 4X more engine protection than required by the Detroit Diesel** DD13 Scuffing Test for Specification DFS 93K222.[1]

10W-30 • ADN

Use in vehicles that require *API CK-4, CJ-4, CI-4+, CF · ACEA E9, E7 · Mack EOS-4.5, EO-O · Detroit Diesel DFS 93K222 · DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MB 228.31 · MTU Type 2.1, II, I · MAN 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC III-10 LA · Ford WSS-M2C171-F1 · Chrysler MS-10902*

5W-40 • ADO

Use in vehicles that require *API CK-4, CJ-4, CI-4+, CF, CF-2 · ACEA E9, E7 · Mack EOS-4.5, EO-O · Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MB 228.31 · MTU Type 2.1, II, I · MAN 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC III-10 LA · Allison TES-439 · Chrysler MS 10902 · Ford WSS-M2C171-F1*

15W-40 • ADP

Use in vehicles that require *API CK-4, CJ-4, CI-4+, CF, CF-2 · ACEA E9, E7 · Mack EOS-4.5, EO-O · Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MB 228.31 · MTU Type 2.1, II, I · MAN 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC III-10 LA · Allison TES-439 · Chrysler MS 10902 · Ford WSS-M2C171-F1*

Available in these package sizes:

Protects Against Rust

Signature Series Max-Duty Synthetic Diesel Oil provides up to **2X better** rust protection.[K]

[K]Based on industry standard testing using the NMMA FC-W Rust Test.Test results describe and represent properties of oils that were acquired on the dates listed in Table 1 (see AMSOIL.com/rusttest.aspx). Results do not apply to any subsequent reformulations of such oils or to new oils introduced after completion of testing. All oils were available to consumers at the time of purchase. Testing was completed in November 2017.

Delivers More Wear Protection

Independent testing shows AMSOIL Heavy-Duty Synthetic Diesel Oil delivers **4X more protection** against wear than required by Detroit Diesel's* standard.[RR2] For even greater protection, Signature Series Max-Duty Synthetic Diesel Oil provides **6X more wear protection** than required by the standard.[RR3]

*[RR]Based on independent testing in the Detroit Diesel DD13 Scuffing Test for specification DFS 93K222. [RR2]Based on independent testing in the Detroit Diesel DD13 Scuffing Test for specification DFS 93K222 using 10W-30 as worst-case representation. [RR3]Based on independent testing in the Detroit Diesel DD13 Scuffing Test for specification DFS 93K222 using 5W-30 as worst-case representation. *All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.*

DP020

DP530

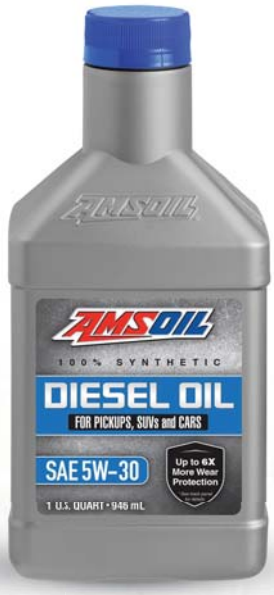

100% Synthetic Diesel Oil

Specifically formulated to protect the efficient diesel power of American diesel pickups, vans, cars and SUVs, giving you the edge to keep your vehicle operating at peak performance. It delivers outstanding value and excellent protection for customers seeking an upgrade over conventional, synthetic-blend or competing synthetic diesel oils.

0W-20 • DP020
Use in vehicles that require *GM dexosD*

5W-30 • DP530
Use in vehicles that require *GM dexosD, dexos2 • Chrysler MS-11106 • Ford WSS-M2C214-B1 • ACEA C3*

Available in these package sizes:

QUART | GALLONS: 55

AMO

ARO

Premium Protection Synthetic Motor Oil

Ideal for gasoline engines and diesel applications not equipped with diesel particulate filters (DPF), where the extra protection of a high-zinc formula is desired. Provides the extra anti-wear protection required by engines with flat-tappet cams and high-tension valve springs.

10W-40 • AMO
Use in vehicles that require *API SL, SJ, SH, SG • API CI-4+, CI-4, CH-4, CF, CF-2 • ISO-L-EMA • Caterpillar* ECF-1 • JASO MA (Motorcycle) • MAN* 271/3275 • MTU Type 2 • Cummins* 20071/20072/20076/20077 • Volvo*, VDS-2, VDS • Mack* EO-M+, EO-M • ACEA A3/B3, E3, E5 • MB 228.1, 228.3, 229.1 • Detroit Diesel* 93K214*

20W-350 • ARO
Use in vehicles that require *API SL, SJ, SH, SG • API CI-4+, CI-4, CH-4, CF, CF-2 • ISO-L-EMA • Caterpillar* ECF-1 • JASO MA (Motorcycle) • MAN* 271/3275 • MTU Type 2 • Cummins* 20071/20072/20076/20077 • Volvo*, VDS-2, VDS • Mack* EO-M+, EO-M • ACEA A3/B3, E3, E5 • MB 228.1, 228.3, 229.1 • Detroit Diesel* 93K214*

Available in these package sizes:

QUART | GALLON: 1 | GALLONS: 2.5 | GALLONS: 55 | GALLONS: 275

SBDF

Available in these package sizes:

2.5 GALLONS | 55 GALLONS | 275 GALLONS

Commercial-Grade Diesel Oil

AMSOIL 15W-40 Commercial-Grade Diesel Oil is an advanced synthetic-blend oil with greater than 50% synthetic base oil content. It provides 2X better wear protection1 to help maximize equipment life and reduce maintenance costs and downtime.

10W-30 • SBDT

Use in equipment that requires *API CK-4, CJ-4, CI-4+, CF • Volvo VDS4.5, VDS4, VDS3 • Mack EOS-4.5, EO-O • Renault RLD-4, RLD-3 • Cummins CES20086, CES20081 • Caterpillar ECF-2, ECF-3, ECF-1-a • DDC 93K218, 93K215, 93K214 • DFS 93K222 • ACEA E9, E7 • MB 228.31 • MAN 3575 • MTU Type 2.1, II, I • JASO DH-2 • Deutz DQC III-10LA • Chrysler MS 10902 • Ford WSS-M2C171-F1*

15W-40 • SBDF

Use in equipment that requires *API CK-4, CJ-4, CI-4+, CF • Volvo VDS4.5, VDS4, VDS3 • Mack EOS-4.5, EO-O • Renault RLD-4, RLD-3 • Cummins CES20086, CES20081 • Caterpillar ECF-2, ECF-3, ECF-1-a • DDC 93K218, 93K215, 93K214 • DFS 93K222 • ACEA E9, E7 • MB 228.31 • MAN 3575 • MTU Type 2.1, II, I • JASO DH-2 • Deutz DQC III-10LA • Chrysler MS 10902 • Ford WSS-M2C171-F1*

Delivers More Wear Protection

Independent testing shows AMSOIL Commercial-Grade Diesel Oil delivers **2X more protection** against wear than required by Detroit Diesel's* standard.[RR]

*[RR]Based on independent testing in the Detroit Diesel DD13 Scuffing Test for specification DFS 93K222. *All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.*

Transmission Fluid

OTF

OTL

OE Synthetic ATF

Resists wear and provides smooth shifts in passenger car/light truck automatic transmissions.

Multi-Vehicle (OTF)

Use in vehicles that require *Allison C-4, TES-389 · BMW 7045E, 8072B, LA 2634, LT 71141 · Chrysler ATF+41, Mopar ASRC, 68089195AA, 68049954AA · Ford MERCON, MERCON V, ESP-M2C166-H, FNR5, M2C924-A, XL-12 · GM DEXRON II, DEXRON III, AutoTrak II · Honda/Acura ATF-Z1 · Hyundai/Kia SP-II , SP-III, Red-1 · IDEMITSU K17 · JASO 1A · JWS 3309, 3314, 3317 · MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339F · Mazda ATF-M III, ATF-MV, F-1 · Mercedes Benz 236.1, 236.2, 236.3, 236.5, 236.6, 236.7, 236.9, 236.10, 236.11, 236.81, 236.91 · Mitsubishi SP-II , SP-III, ATF-J2 · Nissan Matic-D, Matic-J, Matic-K, 402 · Saab 3309 · Shell 3403, LA 2634 · Subaru ATF, ATF-HP · Suzuki 3314, 3317 · Texaco ETL-7045E, ETL-8072B, N402 · Toyota Type T, T-II,T-III,T-IV · Voith 55.6335, 55.6336 · Volvo 97340, 97341 · VW/Audi G 052 162, G 052 990, G 055 025 · ZF TE-ML 03D, 04D, 05L, 09, 11A, 11B, 14A, 14B, 16L, 17C, 20B, 21L*

1AMSOIL warrants the use of this product for Chrysler ATF+4 applications above -38°F. Product does not meet the cold temperature requirement of ATF+4 at -40°F. For warranty information, visit www.amsoil.com/warranty.aspx.

Fuel-Efficient (OTL)

Engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

Use in vehicles that require *Aisin-Warner AW-1 · BMW 83 22 0 142 516, 83 22 2 152 426 · Chrylser Mopar 68157995A, 68218925AB, SP-IV · DSIH 6p805 · Ford MERCON LV · GM DEXRON VI · Honda/Acura DW-1, Type 3.0 · Hyundai/Kia SP-IV, SPH-IV, SP-IV-RR, NWS-9638, SP4-M · JASO 1A-LV · JWS 3324 · Mazda ATF FZ · Mercedes Benz 236.12, 236.14, 236.15, 236.41 · Mitsubishi SP-IV, ATF J3, ATF-PA, ATF-MA1 · Nissan Matic-S, Matic-W · Saab 93 165 147 · Shell M-1375.4, M-1375.5, M-1375.6, M-L12108 · Toyota WS · Volvo 31256774 · VW/Audi G 055 005, G 055 162, G 060 162 · ZF S671 090 255*

Available in these package sizes:

QUART · 1 GALLON · 2.5 GALLONS · 55 GALLONS · 275 GALLONS

ATF

ATL

Signature Series Synthetic ATF

Provides reserve protection in fleet vehicles, heavy-duty pickups, work trucks and other severe-service applications that quickly break down other lubricants.

Multi-Vehicle (ATF)

Use in vehicles that require *Allison C-4, TES-389 · BMW 7045E, 8072B, LA 2634, LT 71141 · Chrysler ATF+4, Mopar ASRC, 68089195AA, 68049954AA · Ford MERCON, MERCON V, ESP-M2C166-H, FNR5, M2C924-A, XL-12 · GM DEXRON II, DEXRON III, AutoTrak II · Honda/Acura ATF-Z1 · Hyundai/Kia SP-II, SP-III, Red-1 · IDEMITSU K17 · JASO 1A · JWS 3309, 3314, 3317 · MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339 Type Z-3, 339F · Mazda ATF-M III, ATF-MV, F-1 · Mercedes Benz 236.1, 236.2, 236.3, 236.5, 236.6, 236.7, 236.9, 236.10, 236.11, 236.81, 236.91 · Mitsubishi SP-II, SP-III, ATF-J2 · Nissan Matic-D, Matic-J, Matic-K, 402 · Saab 3309 · Shell 3403, LA 2634 · Subaru ATF, ATF-HP · Suzuki 3314, 3317 · Texaco ETL-7045E, ETL-8072B, N402 · Toyota Type T, T-II, T-III, T-IV · Voith 55.6335, 55.6336 · Volvo 97340, 97341 · VW/Audi G 052 162, G 052 990, G 055 025 · ZF TE-ML 03D, 04D, 05L, 09, 11A, 11B, 14A, 14B, 14C, 16L, 16M, 17C, 20B, 20C, 21L*

Fuel-Efficient (ATL)

Premium fluid designed for use in both on- and off-highway heavy-duty equipment.

Use in vehicles that require *Aisin-Warner AW-1 · BMW 83 22 0 142 516, 83 22 2 152 426 · Chrysler Mopar 68157995A, 68218925AB, SP-IV · DSIH 6p805 · Ford MERCON LV, SP · GM DEXRON HP, DEXRON VI · Honda/Acura DW-1, Type 3.0 · Hyundai/Kia SP-IV, SPH-IV, SP-IV-RR, NWS-9638, SP4-M · JASO 1A-LV · JWS 3324 · Mazda ATF FZ · Mercedes Benz 236.12, 236.14, 236.15, 236.41 · Mitsubishi SP-IV, ATF J3, ATF-PA, ATF-MA1 · Nissan Matic-S, Matic-W · Saab 93 165 147 · Shell M-1375.4, M-1375.5, M-1375.6, M-L 12108 · Toyota WS · Volvo 31256774 · VW/Audi G 055 005, G 055 162, G 060 162 · ZF S671 090 255*

Available in these package sizes:

EASY-PACK QUART · QUART · 1 GALLON · 2.5 GALLONS · 16 GALLONS · 55 GALLONS · 275 GALLONS

ATD

Torque-Drive® Synthetic Heavy-Duty ATF

Premium fluid designed for use in both on- and off-highway heavy-duty equipment.

Use in vehicles that require *Allison C-4, TES-295, TES-389, TES-668 • Ford MERCON® V • GM DEXRON® III • Isuzu SCS • MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339 Type Z-3, 339F • MB 236.91, 236.10 • Voith 55.6335, 55.6336 • Volvo 97340, 97341 • ZF TE-ML 03D, TE-ML 04D, TE-ML 14A, TE-ML 14B,TE-ML 14C, TE-ML 17C, TE-ML 20B, TE-ML 20C*

Available in these package sizes:

1 GALLON | 2.5 GALLONS | 16 GALLONS | 55 GALLONS | 275 GALLONS

Gear Oil

SVG

SEVERE GEAR® Synthetic Gear Lube

Specifically engineered for high-demand applications, including trailer towing, heavy hauling, 4x4 off-road driving, commercial use and racing. Flexible easy-pack helps you access tough-to-reach fill holes and eliminates the need for a pump.

75W-90 • SVG
Use in vehicles that require *API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)*

80W-90 • AGL
Use in vehicles that require *API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)*

75W-110 • SVT
Use in vehicles that require *API GL-5/MT-1 • MIL-PRF-2105E • Mack GO-J • Dana SHAES 234 (Eaton PS-037)*

75W-140 • SVO
Use in vehicles that require *API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)*

Available in these package sizes:

EASY-PACK QUART | QUART | 5 GALLONS | 16 GALLONS | 55 GALLONS | 275 GALLONS

FGR

Long Life Synthetic Gear Lube (FGR)

Specifically engineered for extended drain intervals up to 500,000 miles as set by equipment manufacturers for over-the-road trucks and heavy equipment.

75W-90 • FGR
Use in differentials that require *API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J+ • Dana SHAES 256 (Eaton PS-163)*

Available in these package sizes:

QUART | 1 GALLON | 5 GALLONS | 16 GALLONS | 55 GALLONS | 275 GALLONS

Gasoline Additives

AST

Gasoline Stabilizer (AST)

Helps prevent the formation of varnish and sludge in stored seasonal equipment such as snowmobiles, lawnmowers, motorcycles and boats. One ounce treats 2.5 gallons of fuel.

Available in these package sizes:

16 OUNCE BOTTLE

API

P.i.® (API)

Maximizes fuel economy and reduces emissions in gasoline direct-injected and port-fuel-injected engines. Bottle compatible with capless fuel systems. Treats up to 30 gallons. Add entire bottle to tank every 4,000 miles.

Available in these package sizes:

12 OUNCE BOTTLE

AQS

Quickshot® (AQS)

Effectively addresses performance issues related to ethanol, water and dirty pump gas in two- and four-stroke gasoline-powered engines and powersports equipment fuel systems, restoring peak performance. Designed for an initial clean-up dose of 8-oz. per 6 gallons of gasoline, followed by 8 oz. per 12 gallons thereafter.

Available in these package sizes:

8 OUNCE BOTTLE

QUART

AOB

DOMINATOR® Octane Boost (AOB)

Improves the performance of all two-and four-stroke gasoline-fueled engines. Treats up to 15 gallons of gasoline.

Available in these package sizes:

12 OUNCE BOTTLE

UCL

Upper Cylinder Lubricant Gasoline Additive (UCL)

Lubricates fuel system and upper cylinders. Fights ethanol-related corrosion. Helps keep injectors clean. Bottle compatible with capless fuel systems. Use entire bottle at every fill-up.

Available in these package sizes:

6 OUNCE Bottle

Diesel Additives

DRC

Diesel Recovery (DRC)

Emergency diesel fuel treatment that dissolves the wax crystals that form when diesel fuel has surpassed its cloud point. One ounce treats 1 gallon of fuel.

Available in these package sizes:

30 OUNCE BOTTLE

ACB

Diesel Octane Boost (ACB)

Raises the cetane number of diesel fuel up to eight points for maximum horsepower, increased fuel economy and easier starts in all diesel engines. One ounce treats up to 10 gallons of fuel.

Available in these package sizes:

16 OUNCE BOTTLE · 64 OUNCE BOTTLE · 5 GALLONS · 55 GALLONS

ADF

Diesel Injector Clean (ADF)

Targets traditional nozzle deposits, combustion chamber deposits and internal diesel injector deposits found in HPCR injectors. Lubricates to reduce fuel pump and injector wear. Concentrated for rapid results, maximum horsepower and up to 8 percent increased fuel economy in engines with accumulated deposits. One ounce treats up to 5 gallons of fuel.

Available in these package sizes:

8 OUNCE BOTTLE · 16 OUNCE BOTTLE · 64 OUNCE BOTTLE · 5 GALLONS · 55 GALLONS

ADD

Diesel Cold Flow (ADD)

Effectively modifies wax crystal formation at low temperatures to depress diesel fuel pour point, prevent wax settling and improve cold-flow filtration properties. Lowers CFPP by up to 40˚F (22˚C) in ULSD. One ounce treats up to 5 gallons of fuel.

Available in these package sizes:

16 OUNCE BOTTLE · 5 GALLONS · 55 GALLONS

ADS

Diesel Injector Clean + Cetane Boost (ADS)

Combines the superior deposit-removing properties of Diesel Injector Clean with the cetane-boosting benefits of Diesel Cetane Boost in one convenient package. Safe for use in all diesel fuels, including biodiesel. One ounce treats up to 5 gallons of fuel.

Available in these package sizes:

8 OUNCE BOTTLE · 16 OUNCE BOTTLE · 64 OUNCE BOTTLE · 5 GALLONS · 55 GALLONS

ADB

Diesel All-In-One (ADB)

Combines the superior detergency and improved lubricity of Diesel Injector Clean, the excellent cold-flow and anti-gelling properties of Diesel Cold Flow and the increased horsepower and cetane of Diesel Cetane Boost in one convenient package. Safe for use in all diesel fuels, including biodiesel. One ounce treats up to 2.5 gallons of fuel.

Available in these package sizes:

8 OUNCE BOTTLE · 16 OUNCE BOTTLE · 64 OUNCE BOTTLE · 5 GALLONS · 55 GALLONS

Cleaners & Protectants

AED

Engine Degreaser (AED)

Effectively cleans engine surfaces by cutting through grease, oil and grime.

AGC

Glass Cleaner (AGC)

Cuts through grease and grime faster than other leading glass cleaners, stays where you spray it and leaves no streaks.

AMP

Metal Protector (AMP)

Displaces water, penetrates, lubricates and protects metal surfaces from corrosion, including hinges, squeaky mechanical objects, electrical systems and more.

AMH

Heavy-Duty Metal Protector (AMH)

Penetrates and adheres to metal surfaces, leaving a long-lasting coating that protects against the damaging effects of salt, moisture or chemical corrosion.

FLSH

Engine and Transmission Flush (FLSH)

Helps restore operating efficiency, increase fuel economy and reduce emissions in gasoline and diesel engines and automatic transmissions.

Available in these package sizes:

16 OUNCE BOTTLE | 5 GALLONS | 55 GALLONS

FOG

Engine Fogging Oil (FOG)

Helps prevent corrosion and dry starts to internal engine components found in outboard motors, lawn and garden equipment, motorcycles, snowmobiles, ATVs, motor homes and generators during storage or long periods of inactivity.

APF

Power Foam® (APF)

Improves starting and performance by cleaning dirty intake systems and spark plugs; freeing sticky valves and removing gum, varnish and carbon deposits commonly found in carburetors.

ADG

Heavy-Duty Degreaser (ADG)

Formulated with powerful and fast-acting solvents, attacking petroleum-based grime on a molecular level to loosen its hold on metal, concrete and other surfaces.

ALS

Silicone Spray (ALS)

Perfect for lubricating or protecting rubber, nylon, plastics, upholstery, vinyl, wood, cardboard, fiberglass. Also excellent for waterproofing leather products.

BPC

Brake & Parts Cleaner (BPC)

Professional-strength parts cleaner that quickly removes oil, grease, brake fluid and other contaminants from brake parts and other automotive components.

G2676

Fluid Extraction Pump (G2676)

Aids in the removal of old fluids when servicing vehicles.

Coolant

ANTPC

Available in these package sizes:

1 GALLON | 55 GALLONS | 264 GALLONS

Passenger Car/Light Truck Antifreeze & Coolant (ANTPC)

Engineered to exceed original equipment manufacturer requirements for up to 150,000 miles or 5 years, whichever comes first, in passenger cars and light trucks. Pre-mixed formula.

***Formulated for use in ALL domestic and import passenger cars and light trucks*. Engineered to meet original equipment manufacturer (OEM) specifications** *GM 6277; JIS K2234; VW TL 774D; Ford WSS-M97B44-D and ASTM D3306 requirements.*

ANT

Available in these package sizes:

1 GALLON | 55 GALLONS | 264 GALLONS

Propylene Glycol Antifreeze & Coolant (ANT)

Combines the benefits of biodegradability, low toxicity and all-climate protection for up to 150,000 miles or 5 years, whichever comes first, in passenger cars and light trucks. Protection up to 1,000,000 miles, 20,000 hours or 8 years, whichever comes first, in heavy-duty applications. Concentrated formula.

Use in applications that require *ASTM D3306, D6210, D7583, D7820 • TMC RP329B, TMC RP338 • AS/NZS 2108.2004 Type A*

Suitable for use with *Case New Holland • Cummins 14603 • Cummins 3666132 • DDC 7SE 298, 93K217 • Freightliner 48-22880 • GM Heavy Truck • International Truck and Engine / Navistar CEMS B-1 Type III-A • JIS K2234 • MAN 324 NF • MB DBL 7700 • MTU MTL 5048 • Kenworth RO26-170-97 • Mack 014GS17004, 014GS17009 • PACCAR CS0185 • DAF MAT 74002 • Peterbilt 8502.002 • Scania TB1451 • Volvo Heavy Truck*

ANTHD

Available in these package sizes:

1 GALLON | 55 GALLONS | 264 GALLONS

Heavy-Duty Antifreeze & Coolant (ANTHD)

Provides superior heat transfer and excellent protection against corrosion, cylinder-liner cavitation, freezing and boilover. Protection up to 1,000,000 miles, 20,000 hours or 8 years, whichever comes first. Pre-mixed formula.

Use in applications that require *ASTM D3306, D6210, D7583, D7820 • TMC RP329B, TMC RP338 • AS/NZS 2108.2004 Type A*

Suitable for use with *Case New Holland • Cummins 14603 • Cummins 3666132 • DDC 7SE 298, 93K217 • Freightliner 48-22880 • GM Heavy Truck • International Truck and Engine / Navistar CEMS B-1 Type III-A • JIS K2234 • MAN 324 NF • MB DBL 7700 • MTU MTL 5048 • Kenworth RO26-170-97 • Mack 014GS17004, 014GS17009 • PACCAR CS0185 • DAF MAT 74002 • Peterbilt 8502.002 • Scania TB1451 • Volvo Heavy Truck*

Air Tool Oil/Compressor Oil/Brake Fluid/Power Steering Fluid

AIR

Synthetic Air Tool Oil (AIR)

Effectively lubricates rotary and piston-type air-tool bearings and motors, while managing moisture and conditioning rubber and plastic seals and O-rings.

PCK

PCI

Synthetic Compressor Oil

Superior protection for rotary screw, rotary vane, reciprocating and other compressor applications.

PCI

Use in compressors that require *ISO 46 • SAE 20*

PCK

Use in compressors that require *ISO 100 • SAE 30/40*

Available in these package sizes:



BFLV

DOT 3 & 4 Synthetic Brake Fluid (BFLV)

High-performance brake fluid specially designed as a multi-use product for passenger-car, light-truck and powersports applications.

PSF

Multi-Vehicle Synthetic Power Steering Fluid (PSF)

Provides excellent wear protection, long component life and quiet operation in most passenger car/light trucks.

Use in applications that require *American Motor Corporation C 4124; 4634 • BMW 82 11 0 148 132; 83 29 0 429 576; 81 22 1 468 879 & 82 11 1 468 041 • Chrysler MS-1872; MS-5931, MS-9602 & MS-11655 • Ford M2C138-CJ; ESW-M2C128-C&D; M2C195-A; M2C204-A & M2C33-F • GM/Saginaw PSF 9985010; 9985835; 89021184; 1050017 • Hyundai/Kia PSF-3; PSF-4 & PSF 00232-19017 • Mercedes Benz 236.3; 345.0; 001 989 24 03 10; 001 989 24 03 12 & Q 1 32 0001 • Mitsubishi Diamond SP III & PS Fluid • Navistar TMS 6810 • Nissan PSF-II • Porsche 000 043 206 56 • Saab 93160548; (45) 30 09 800 & 30 32 380 • Subaru K0209A0080 • Toyota PSF Type EH; P/N 008886-01; 008886-126 • Volvo 1161529 & 30741424 • VW/Audi TL-52146; G002000; G 004 000 M2; G 004 000 M7 & G 004 000 M8*

Available in these package sizes:



Personalized Marketing Support

We drive customers to your business with customized marketing designed to help you grow and win.

Increase Sales Per Ticket

AMSOIL provides high-valued products and technical experts to help you sell the protection and performance your customers deserve.

Pain-Free Logistics

We offer fast, free shipping* and volume discounts with no contracts, plus no-cost dispensing equipment* to make it easy for you to grow your business.

Expansive Product and Package Selection

We carry a full line of synthetic and synthetic-blend lubricants, including high-mileage, European and diesel oils.

A Brand in Demand

Carrying AMSOIL products attracts loyal, passionate, high-value customers and enhances the reputation of your business.

FORMULATED, BLENDED AND PACKAGED IN THE USA

AMSOIL
The First in Synthetics®

Contact your local full-service AMSOIL Dealer for more information on AMSOIL products or to place an order. You may also order direct by calling AMSOIL INC. at 1-800-777-7094 and providing the referral number listed here. ▼

Referral # 1606951

AMSOIL INC., 925 Tower Ave., Superior, WI 54880 • 715-392-7101 • Printed in the USA
© 2024, AMSOIL INC. All rights reserved. The AMSOIL logo is a registered trademark of AMSOIL INC.